

SSR




SSR

ITALIANO





TIPOLOGIA	CATENA ENDURO/STRADALE
NOME	SSR
DESCRIZIONE	La catena Sunstar con o-ring 520SSR (SSR = Standard Sealed Ring)
CODICE	SS520SSR-XXXN
CARATTERISTICHE TECNICHE E BENEFICI	La catena Sunstar con o-ring 520SSR (SSR = Standard Sealed Ring) è una catena di lunga durata per utilizzi intensi che fa uso di o-ring in gomma della migliore qualità per mantenere la lubrificazione, garantendo minore attrito e il migliore trasferimento di potenza. È costruita con acciaio in lega trattato termicamente, per migliore resistenza e durata. La catena SSR è disponibile per passo 520 fino a 400cc in colore naturale (non oro) e in lunghezze pretagliate da 100 a 120 link (utilizza chiusura clip).
O-RING	STANDARD
ACCESSORI	Pignoni P-DRIVE, corone STEEL, TRIPLE STAR, WORKS Z

Chain Model	Length Options	Ring Type	Link Type	Max CC Street / Offroad	Weight 100L (LBS)	Weight 100L (KG)	Pin Length (mm)	Inner Plate Thick-ness	Outer Plate Thick-ness	Maximum Tensile Strenght (lbs)	Maximum tensile strength (N)
420MXR	104 - 140	None	Clip	150 / 150	1.76	0.79	15,70	1.80	1.45	4,980	22,152
428MXR	118 - 142	None	Clip	50 / 150	2.13	0.97	17,60	1.80	1.80	5,780	25,710
520MXR1	108 - 120	None	Clip	NA / 500	2.99	1.36	17,70	1.80	2.00	8,970	39,900
520EXR1	108 - 120	Dual Guard	Rivet	NA / 450	3.23	1,46	18,35	2.00	2.00	8.390	37,300
520SSR	100 - 120	O-ring	Clip	400 / 400	3.36	1.52	19,90	2.00	2.00	7,670	34,117
520RDG	106 - 120	DualGuard	Rivet	750 / 750	3.39	1,54	19,90	2.00	2.00	8,490	37,765
525RDG	100 - 124	DualGuard	Rivet	900 / 750	4.30	1.95	22,85	2.40	2.30	8,820	39,233
530RDG	102 - 122	DualGuard	Rivet	1000 / 750	4.47	2.03	24,90	2.40	2.30	9,480	42,169
520XTG	104 - 120	TripleGuard	Clip	400 / 750	3.75	1.70	20,80	2.00	2.00	8,460	37,631
520RTG1	98 - 120	TripleGuard	Rivet	1000 / 750	3.75	1.70	20,80	2.20	2.20	8,800	39,144
525RTG1	100 - 124	TripleGuard	Rivet	1000 / 750	4.30	1.95	22,85	2.40	2.30	9,300	41,368
530RTG1	106 - 120	TripleGuard	Rivet	1400 / 900	4.63	2.10	24,90	2.40	2.40	9,900	44,037

CARATTERISTICHE DELLE CATENE SUNSTAR

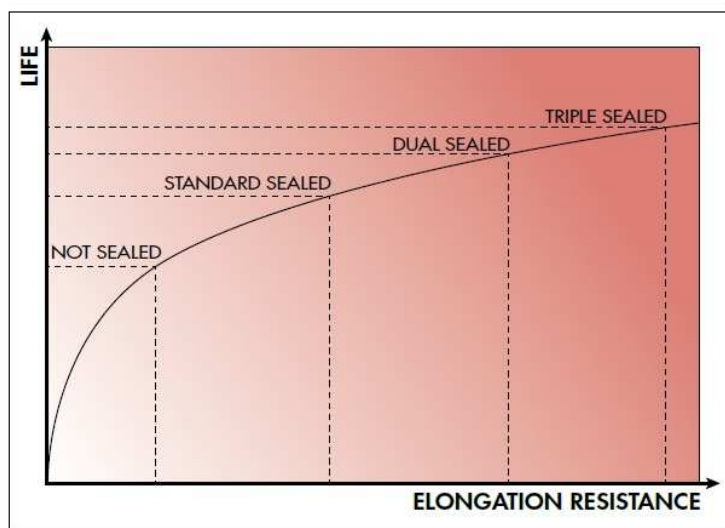

DIFFERENTI TIPOLOGIE DELLE GUARNIZIONI SUNSTAR

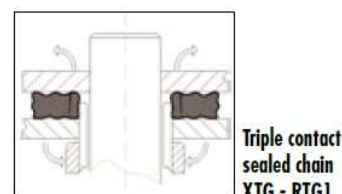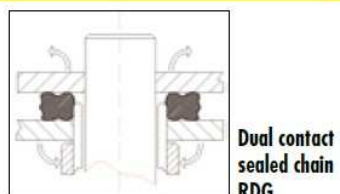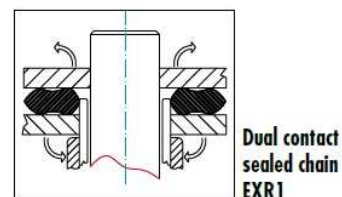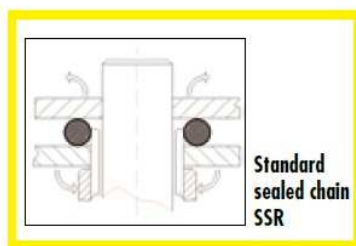

SSR

Link	Listino Catene											
	420MXR	428MXR	520MXR1	520EXR1	520SSR	520RDG	525RDG	530RDG	520XTG	520RTG1	525RTG1	530RTG1
98										125,20		
100					71,80		96,10				147,20	
102					73,10			104,30		130,20		
104	32,00				74,50				102,80			
106					75,80	86,90	101,70	108,20	104,70	135,10		175,70
108			74,70	101,40	77,20		103,50	110,20	106,60		158,80	179,00
110	33,70		76,00	103,20	78,50	90,10	105,40	112,20	108,50	140,10	161,70	182,20
112	34,20		77,40	105,00	79,90	91,70	107,20	114,10	110,40	142,50	164,60	185,50
114			78,70	106,80	81,20	93,20	109,10	116,10	112,30	145,00	167,40	188,70
116	35,30		80,00	108,60	82,60	94,80	110,90	118,10	114,20	147,50	170,30	192,00
118	35,90	47,40	81,30	110,40	83,90	96,40	112,80	120,10	116,10	150,00	173,20	195,30
120	36,40	48,10	82,70	112,30	85,30	98,00	114,60	122,00	118,00	152,40	176,10	198,50
122		48,80						124,00				201,80
124	37,50	49,60					118,30				181,90	
126	38,10	50,30										
128		51,00										
130	39,20	51,80										
132		52,50										
134		53,20										
136		54,00										
140	41,90	55,40										
142		56,20										
1 mt.	23,50	31,00	41,00	57,10	44,10	51,20	59,10	62,70	60,10	79,70	91,10	103,70
Clip link	2,00	2,40	3,30	5,40	4,50	5,10	5,10	5,30	5,40	7,30	5,60	5,80


SSR

ENGLISH


TYPE	ONROAD/ENDURO CHAIN
SERIES	SSR
DESCRIPTION	The Sunstar 520SSR o-ring chain (SSR = Standard Sealed Ring)
PART NUMBER	SS520SSR-XXXN
TECHNICAL FEATURES AND BENEFITS	The Sunstar 520SSR o-ring chain (SSR = Standard Sealed Ring) is a heavy duty, long lasting sealed chain that uses only the highest quality rubber o-rings that maintain lubricity, resulting in less friction and the smoothest transfer of power. It is constructed with special heat treated alloy steel for added strength and life. The SSR chain is available only in 520 chain pitch for any motorcycle up to 400cc in the natural colour option (non-gold) and in pre-cut lengths of 100 till 120 links (uses clip type connecting link).
O-RING	STANDARD
ACCESSORIES	P-DRIVE front sprocket, STEEL, TRIPLESTAR, WORKS Z SPROCKET
COMPARE	

Chain Model	Length Options	Ring Type	Link Type	Max CC Street / Offroad	Weight 100L (LBS)	Weight 100L (KG)	Pin Length (mm)	Inner Plate Thick-ness	Outer Plate Thick-ness	Maximum Tensile Strength (lbs)	Maximum tensile strength (N)
420MXR	104 - 140	None	Clip	150 / 150	1.76	0.79	15,70	1.80	1.45	4,980	22,152
428MXR	118 - 142	None	Clip	50 / 150	2.13	0.97	17,60	1.80	1.80	5,780	25,710
520MXR1	108 - 120	None	Clip	NA / 500	2.99	1.36	17,70	1.80	2.00	8,970	39,900
520EXR1	108 - 120	Dual Guard	Rivet	NA / 450	3.23	1,46	18,35	2.00	2.00	8.390	37,300
520SSR	100 - 120	O-ring	Clip	400 / 400	3.36	1.52	19,90	2.00	2.00	7,670	34,117
520RDG	106 - 120	DualGuard	Rivet	750 / 750	3.39	1,54	19,90	2.00	2.00	8,490	37,765
525RDG	100 - 124	DualGuard	Rivet	900 / 750	4.30	1.95	22,85	2.40	2.30	8,820	39,233
530RDG	102 - 122	DualGuard	Rivet	1000 / 750	4.47	2.03	24,90	2.40	2.30	9,480	42,169
520XTG	104 - 120	TripleGuard	Clip	400 / 750	3.75	1.70	20,80	2.00	2.00	8,460	37,631
520RTG1	98 - 120	TripleGuard	Rivet	1000 / 750	3.75	1.70	20,80	2.20	2.20	8,800	39,144
525RTG1	100 - 124	TripleGuard	Rivet	1000 / 750	4.30	1.95	22,85	2.40	2.30	9,300	41,368
530RTG1	106 - 120	TripleGuard	Rivet	1400 / 900	4.63	2.10	24,90	2.40	2.40	9,900	44,037

DISTINCTIVE FEATURES OF SUNSTAR CHAIN

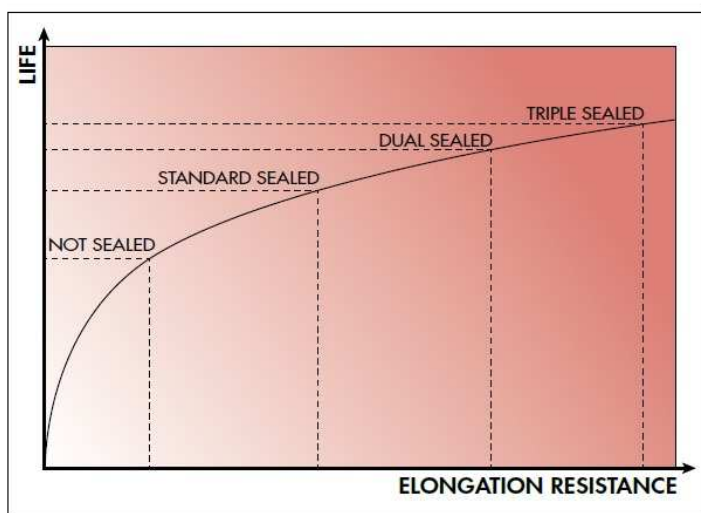

DIFFERENT TYPES OF OUR SUNSTAR-SEAL LINE UP

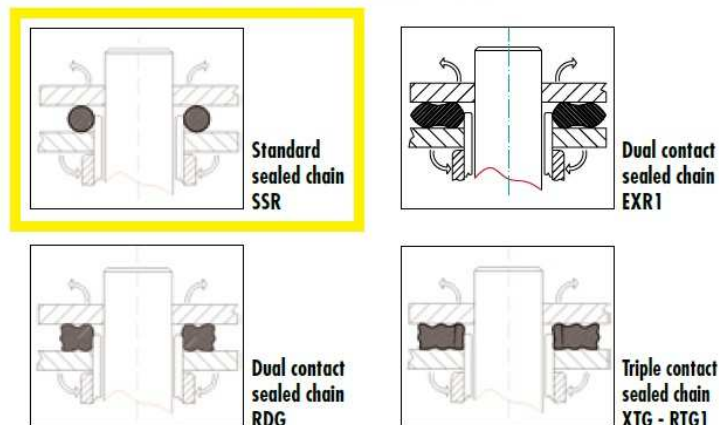

SSR

Link	Chains price list											
	420MXR	428MXR	520MXR1	520EXR1	520SSR	520RDG	525RDG	530RDG	520XTG	520RTG1	525RTG1	530RTG1
98										125,20		
100					71,80		96,10				147,20	
102					73,10			104,30		130,20		
104	32,00				74,50				102,80			
106					75,80	86,90	101,70	108,20	104,70	135,10		175,70
108			74,70	101,40	77,20		103,50	110,20	106,60		158,80	179,00
110	33,70		76,00	103,20	78,50	90,10	105,40	112,20	108,50	140,10	161,70	182,20
112	34,20		77,40	105,00	79,90	91,70	107,20	114,10	110,40	142,50	164,60	185,50
114			78,70	106,80	81,20	93,20	109,10	116,10	112,30	145,00	167,40	188,70
116	35,30		80,00	108,60	82,60	94,80	110,90	118,10	114,20	147,50	170,30	192,00
118	35,90	47,40	81,30	110,40	83,90	96,40	112,80	120,10	116,10	150,00	173,20	195,30
120	36,40	48,10	82,70	112,30	85,30	98,00	114,60	122,00	118,00	152,40	176,10	198,50
122		48,80						124,00				201,80
124	37,50	49,60					118,30				181,90	
126	38,10	50,30										
128		51,00										
130	39,20	51,80										
132		52,50										
134		53,20										
136		54,00										
140	41,90	55,40										
142		56,20										
1 mt.	23,50	31,00	41,00	57,10	44,10	51,20	59,10	62,70	60,10	79,70	91,10	103,70
Clip link	2,00	2,40	3,30	5,40	4,50	5,10	5,10	5,30	5,40	7,30	5,60	5,80